

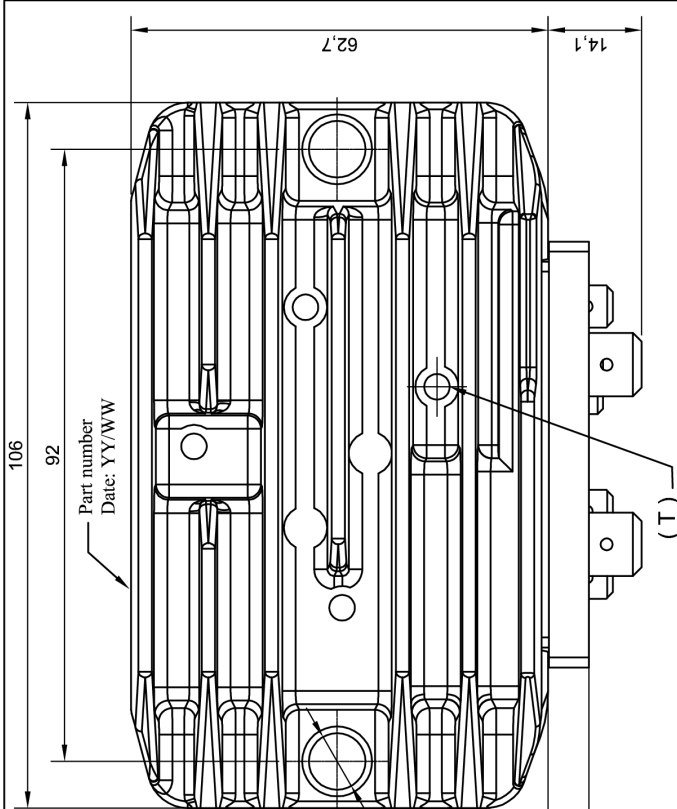
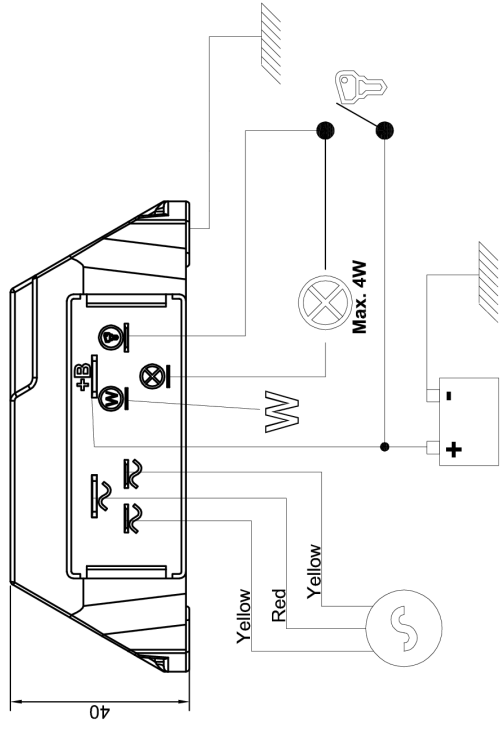


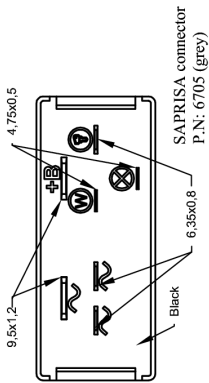

FEATURES

VREG= 14,2 ±0,2V (I <2Amp.)
I max. 30A.
Max. AV switching key w.r.t. battery ±0,1 V
W.L.= Led or bulb max. 4W
Voltage transients protection
Short circuit protection (Max 0,4A)
Shutdown <850 rpm
W= Frequency signal f=(N°poles x RPM)/120
Regulator case ground contact must be guaranteed (I>30A)
Max temperatures in (T)
With load 95°C
Non operation 110°C

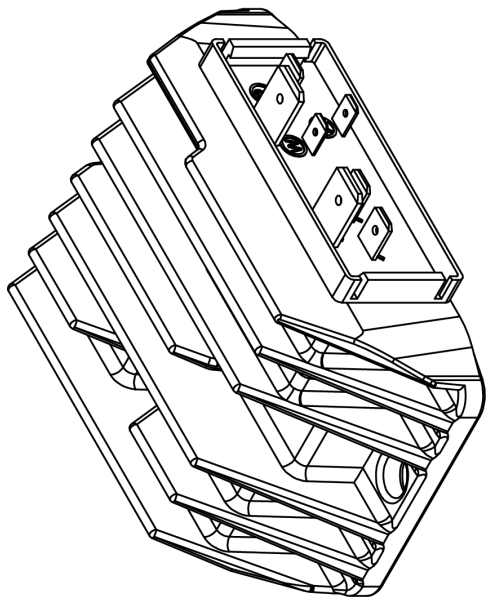

2					
1	Num.	Date:	Alteration designation		
	OPS REGULATOR 12V		7155		
	Date: 07/11/11	Drawing: Ignasi	Scale:		
	COPIA NO CONTROLADA				
	AETSA www.aetsa.com saprisa@aetsa.com +34 933 072 400				